

WONDERFLOOR
Vinyl Flooring

www.wonderfloor.co.in

KRAYONS
School flooring





KRAYONS - A range of flooring in bright lively colours to add freshness, cheerfulness and joy to the interiors. Krayons is a designers' delight and a medium to get imaginative and creative by mix-and-match of different shapes, sizes and colours. The product is available in a roll form and is ideal for schools, colleges, educational institutions, playgroup areas, activity areas, children room etc.

Salient Features

- Specially formulated high abrasion resistant wear layer
- Shock absorbing cushion base layer
- Sound absorbing and quiet floors
- These flooring are Glass Fibre Tissue (GFT) re-inforced for dimensional stability and strength
- The product is suitable for medium traffic areas
- PUR surface tretment for surface resistance and easy maintenance

Krayons multiple layers for multiple benefits

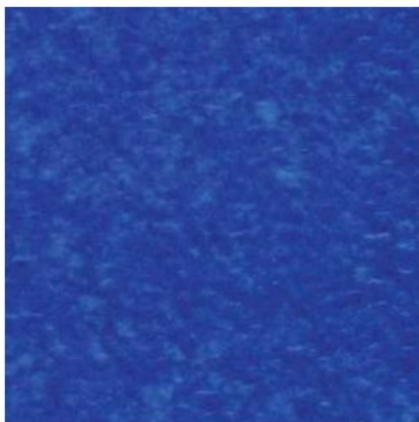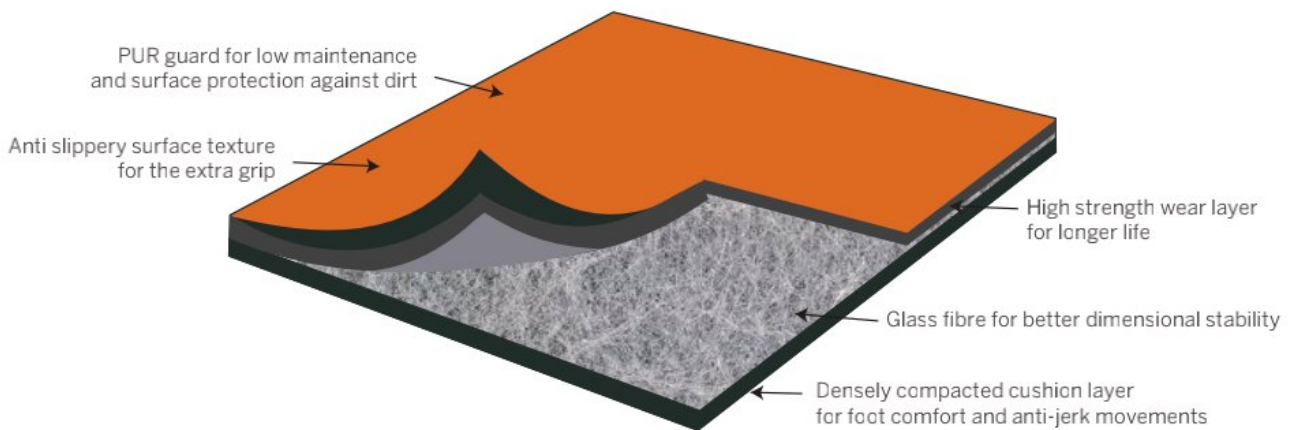

Frosty Blue



Frosty Yellow




Frosty Orange



Frosty Beige



Frosty Red

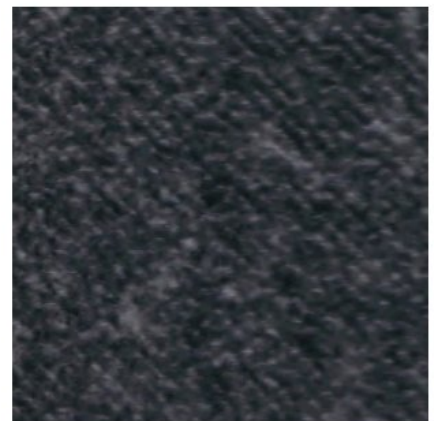

Frosty Grey





Pastel Blue



Pastel Orange



Pastel Lemon



Pastel Cherry



Pastel Green




Pastel Purple



Pastel Dark Blue



Pastel Pink

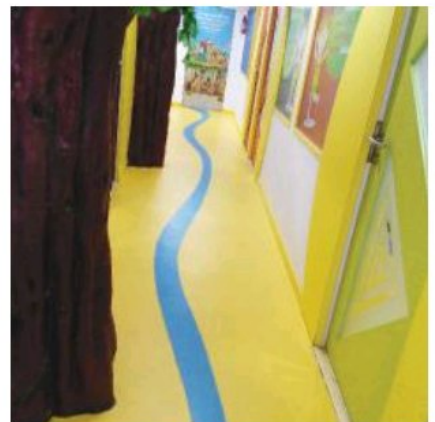

WONDERFLOOR - the world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

PERFORMANCE CHARACTERISTICS

| CHARACTERISTICS | TEST METHOD | RESULT |
|--------------------------------|---|--|
| Thickness (mm) |  EN 428 | 2.0 |
| Total Weight (g/m) |  EN 430 | 1.63 Kg/Sq. mtr |
| Rolls dimension (lm) |  EN 426 | 2 linear mtr x 20 linear mtr |
| Thickness of wear layer (mm) | EN 429 | 0.35 |
| Residual Indentation (mm) |  IS : 3464:86 | 0.12 |
| Abrasion Resistance | EN 660-2 EN 435 | WEAR GROUP P |
| Dimension Stability (%) |  EN 434 | 0.1 |
| Flammability |  EN 13501-1 | C _{fi} -S ₁ |
| Colour Fastness to day light |  ISO 105-B02 | Blue Wool Standard 5 |
| Resistance to chemicals |  EN 423 | No visible change |
| Slip Resistance |  DIN 51130 | R 9 |
| Flexibility at Low temperature |  IS : 3462:86 | Shall not break, crack or show any other sign of failure |
| Water extraction (%) Max | ASTM D 1239 | 0.35 |
| Surface Protection |  PUR | PUR |
| Bearing a castor chair |  EN 425 | Suitable/Continuous use |
| Sound absorption |  ISO 140-8, EN ISO 717-2 | 14 db |

RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18° C and 27° C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable masts to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com

or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

ISO 9001-2015
Certificate No. 85 100 00117043



RMG POLYVINYL INDIA LIMITED

Corporate Office: UGSR 4, Ansal Plaza, Sector 1, Vaishali, Ghaziabad 201 010, (Uttar Pradesh) INDIA

Tel.: +91 120-4284802/803/804/805/806, Fax: +91 11 66173679.

E-mail: info@rmgpoly.com, website: www.wonderfloor.co.in

Regional Offices : • Ahmedabad: +91 9377262959 • Bangalore: +91 9341263704 • Bhubaneswar: +91 9582624009

• Chennai: +91 9380353335 • Guwahati: +91 8822021287 • Hyderabad: +91 9533791422

• Indore: +91 7838590904 • Kolkata: +91 8820568222, 9582538009 • Kochi: +91 8893191421

• Lucknow: +91 9026708007 • Mumbai: +91 9323675979 • Pune: +91 9595191421

• Patna: +91 8252110100

www.rmgpoly.co.in, www.wonderfloor.co.in WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited