

**WONDERFLOOR**  
Vinyl Flooring

[www.wonderfloor.com](http://www.wonderfloor.com)

Antiskid Transport Flooring

**Safety**



**Safety Flooring**





SHATABDI BLUE



EC GREY




CRIMSON RED



N. BLUE



KL GREY

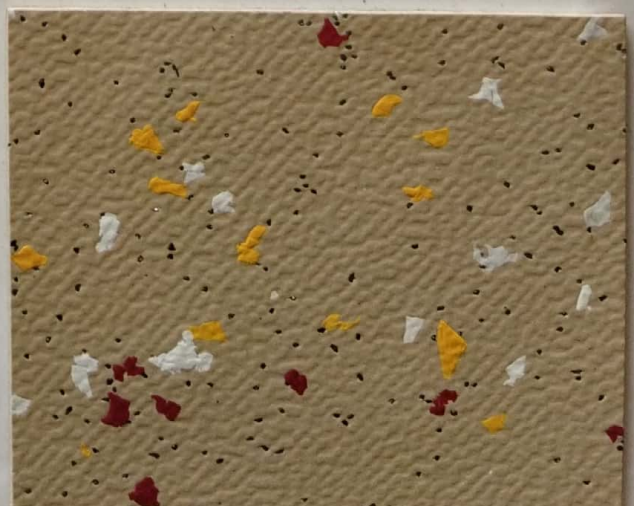

SR BEIGE








TERRACOTTA



SANDY BROWN




SPARKLE YELLOW

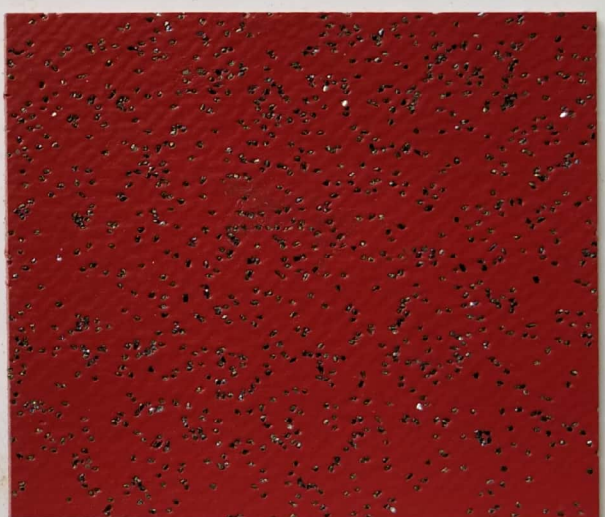

\*\* SPARKLE RED



\*\* SPARKLE GREY

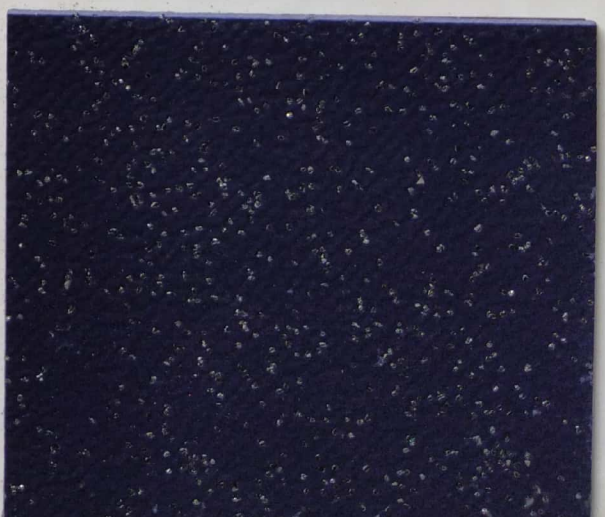

\*\* SPARKLE BLUE





















\*\* AGAINST BULK QUANTITY ORDER ONLY.



**WONDERFLOOR** - the world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the-art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**SAFETY** flooring is designed for a long life with high wear and tear resistance. Manufactured with "Multi-Layer Technology", and embedded with polymer chips & carborundum for added aesthetics, enhanced abrasion Resistance & slip resistance. This flooring is used in buses, metro coaches, trains and factories etc. for handling heavy traffic with extra grip. SAFETY flooring is available in "1.5mm/2.0mm/3.0mm thickness" in various range of design patterns and colours such as embossed patterns, mosaic with quartz patterns etc.

## PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	SYMBOLS	TEST METHOD	RESULTS
THICKNESS		EN 428	1.5 MM, 2 MM, 3 MM
TOTAL WEIGHT		EN 430	3.5 KG/SQ. MTR FOR 2MM
ROLL DIMENSION		EN 426	2 LINEAR MTR X 15 LINEAR MTR
RESIDUAL INDENTATION AFTER STATIC LOAD		EN 433	≤ 0.10 MM
DIMENSIONAL STABILITY		EN 434	≤ 0.40%
FLEXIBILITY LOW TEMPERATURE		EN 435	40 MM MANDREL, PASSED
ABRASION RESISTANCE		EN 660-2 EN 649	WEAR GROUP T
SURFACE BURNING		ASTM E 84	FLAME SPREAD CLASS A SMOKE DEVELOPMENT CLASS A
SURFACE SPREAD OF FLAME		BS 476 PART 7	CLASS 1
FIRE PROPAGATION		BS 476 PART 6	(I)=10.8 } CLASS "O" (II)=1.7 }
FLAMMABILITY		DIN 4102-1	CLASS B 1
HORIZONTAL & VERTICAL BURNING TEST		IS 15061-2002 (ARAI PASS)	
SOUND ABSORPTION		ISO 140-8 EN ISO	Δ LW = 5db
COLOUR FASTNESS TO DAY LIGHT		ISO 105-B02	>BLUE WOOL STANDARD 5
SLIP RESISTANCE		DIN 51130	R 11
BEARING A CASTER CHAIR		EN 425	SUITABLE/CONTINUOUS USE
RESISTANCE TO CHEMICALS		EN 423	NO VISIBLE CHANGE
PERFORMANCE CLASSIFICATION		EN 685	34, 43

Can be manufactured specifically for Marine usages with low smoke and toxicity value.

### RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18° C and 27° C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic based adhesive of similar type.

### MAINTENANCE

**Do's:** • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable masts to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

**Don'ts:** • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)  
or call : 9711200510

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com) or call : 9873138885

ISO 9001:2015  
Certificate No. 85100 00117043



### RMG POLYVINYL INDIA LIMITED

Corporate Office: UGSR 4, Ansal Plaza, Sector 1, Vaishali, Ghaziabad 201 010, (Uttar Pradesh) INDIA  
Tel.: +91 120-4284802/803/804/805/806, Fax: +91 11 66173679.  
E-mail: [info@rmgpoly.com](mailto:info@rmgpoly.com), website: [www.wonderfloor.com](http://www.wonderfloor.com)

Regional Offices : • Ahmedabad: +91 9377262959 • Bangalore: +91 9341263704 • Bhubaneswar: +91 9582624009  
• Chennai: +91 9380353335 • Guwahati: +91 8822021287 • Hyderabad: +91 9533791422  
• Indore: +91 7838590904 • Kolkata: +91 8820568222, 9582538009 • Kochi: +91 8893191421  
• Lucknow: +91 9026708007 • Mumbai: +91 9323675979 • Pune: +91 9595191421  
• Patna: +91 8252110100

[www.rmgpoly.com](http://www.rmgpoly.com), [www.wonderfloor.com](http://www.wonderfloor.com) WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited