


WONDERFLOOR
Vinyl Flooring

www.wonderfloor.co.in

Trendo

**PRIME
SERIES**

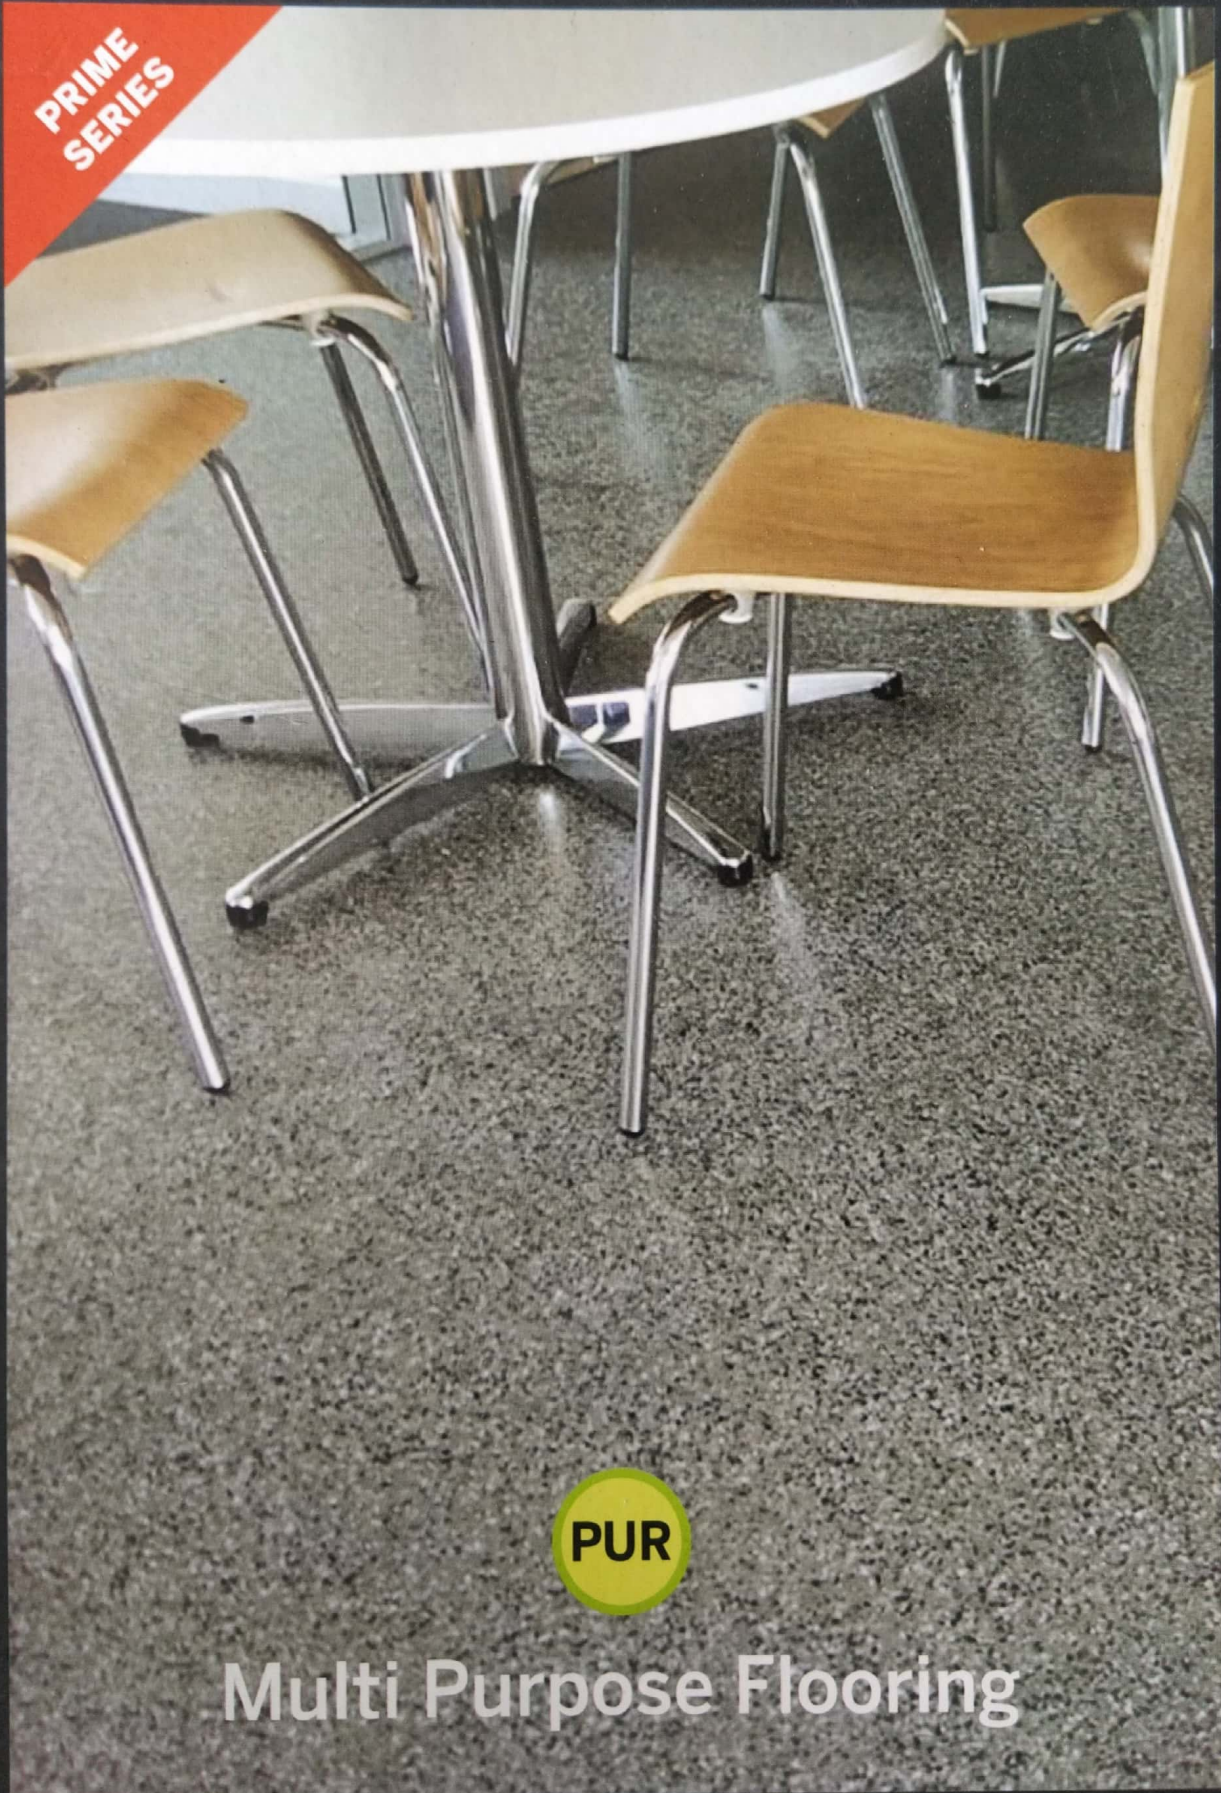

PUR


Multi Purpose Flooring



Ash wood TW 41



Maple white TW 42

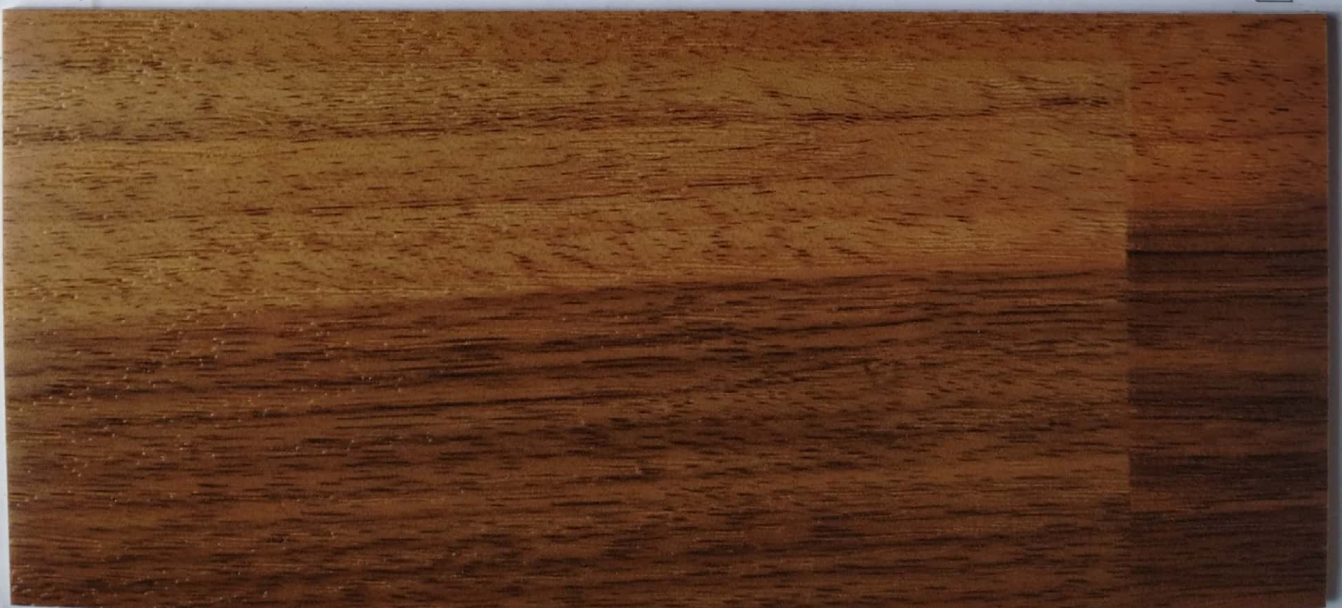


Red Alm TW 43



Eucalyptus TW 44

Trendo multiple layers for multiple benefits

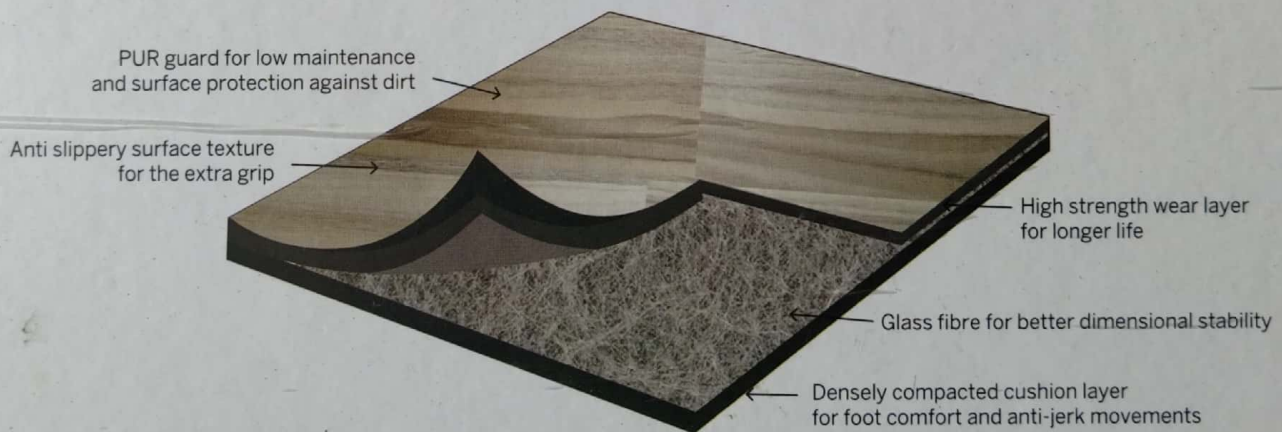

Anti-Bacterial Flooring

Application areas:

- Office Area
- Hospitals
- Hotels
- Cafeteria
- Schools
- Large Retail Space
- Auditorium
- Library



Termite
Proof



Moisture
Proof



Environment
Friendly



Royal Ivory



S Grey



Dk Grey



D Brown



Icy Blue



River Blue



Terracota



F Green



Daffodils



WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the-art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Trendo - Wonderfloor Trendo is a state-of-the-art multi application flooring produced keeping in mind the India quest for the latest trend, the climate conditions and the best abrasion resistance in the category. Trendo flooring is available in attractive design pattern, it is highly suitable for large working areas like offices, Hospitals, libraries, educational institutes, stores, cafeteria and many other similar application.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	RESULT
Thickness (mm)	 EN 428 / ISO 24346	2.00
Total Weight (kgs/sq-mts)	 EN 430	3.20 Kg/Sq. mtr
Rolls dimension (mtrs)	 EN 426	2 mtr X 15 mtr
Surface Protection	 PUR	PUR Protection (optional)
Thickness of wear layer (mm)	 EN 429	0.35
Slip Resistance	 DIN 51130 / ASTM D2047	R 9
Residual Indentation	 EN 433/ISO 23343-1 ASTM F970	≤ 0.40mm
Flexibility (mm)	 EN 435/ISO 24344 ASTM F137	20mm mandrel, passed
Dimension Stability (%)	 EN 434/ISO 23999	≤ 0.10%
Bearing a castor chair	EN 425/ISO4918	Suitable / Continuous use
Performance Classification	EN 685/ISO10874	31,32
Thermal Resistance (m2k/w)	EN 12664/ISO 8302 ASTM 1514	<0.00568, passed
Hygiene / Clean room test	ISO 14644 - 1	Test result demonstrates it inhibits growth of microbes ClassA
Abrasion Resistance Volume loss (weight loss/1000cycles)	EN 660-2 EN 649/ASTMD 3389(8)	Wear group P
Sound absorption	 ISO 140-8, EN ISO 717-2	14DB
Stain Resistance	EN 423/ISO 26987	O, Excellent Resistance
Resistance to chemicals	 ASTM F925	No visible change
Colour Fastness to day light	 ISO 105-B02/ASTM F1515	>Blue Wool Standard 5
Surface spread of flame	BS 476 PART 7	Class 1
Fire Propagation	 BS 467 PART 6	(i) = 10.8 (ii) = 1.7 } Class "O"
Reaction to fire (kw/m2) Class Type	EN ISO 9239-1 EN ISO 11925-2 EN 13501-1:2007+A ASTME - 648-06	CflS 1
Maritime Usage		Suitable

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9711200510
For export enquiries, please e-mail : info@rmgpoly.com
or call : +91 9873138885



RMG POLYVINYL INDIA LIMITED

Corporate Office: UGSR 4, Ansal Plaza, Sector 1, Vaishali, Ghaziabad 201 010, (Uttar Pradesh) INDIA
Tel.: +91 120-4284802/803/804/805/806, Fax: +91 11 66173679.
E-mail: info@rmgpoly.com, website: www.wonderfloor.co.in

Regional Offices : • Ahmedabad: +91 9377262959 • Bangalore: +91 9341263704 • Bhubaneswar: +91 9582624009
• Chennai: +91 9380353335 • Guwahati: +91 8822021287 • Hyderabad: +91 9533791422
• Indore: +91 7838590904 • Kolkata: +91 9582538009 • Kochi: +91 8893191421
• Lucknow: +91 9026708007 • Mumbai: +91 9323675979 • Pune: +91 9595191421
• Patna: +91 8252110100

www.rmgpoly.co.in, www.wonderfloor.co.in WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

